OCULA

GEOMETRIC / SAME ORIENTATION




Eighty-one circular hollows create a precise rhythm of light and shadow on white plaster.


Setting

GEOMETRY AND FORMAT

The piece

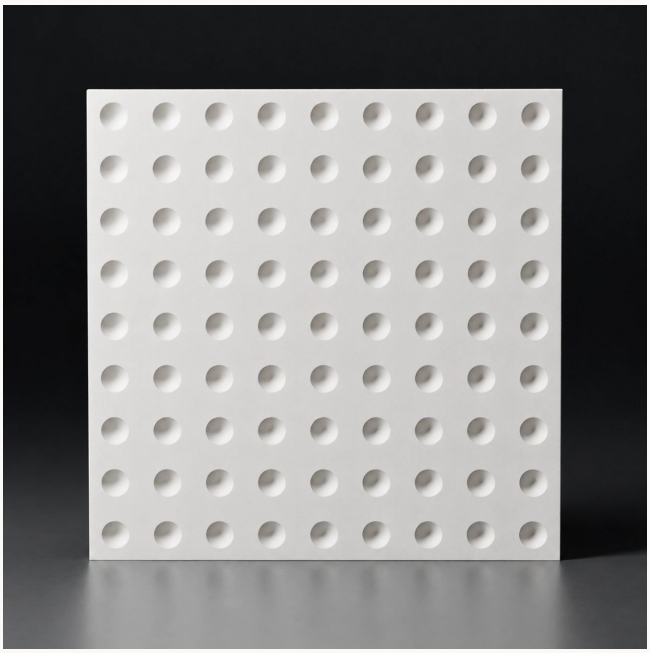

01 Front view

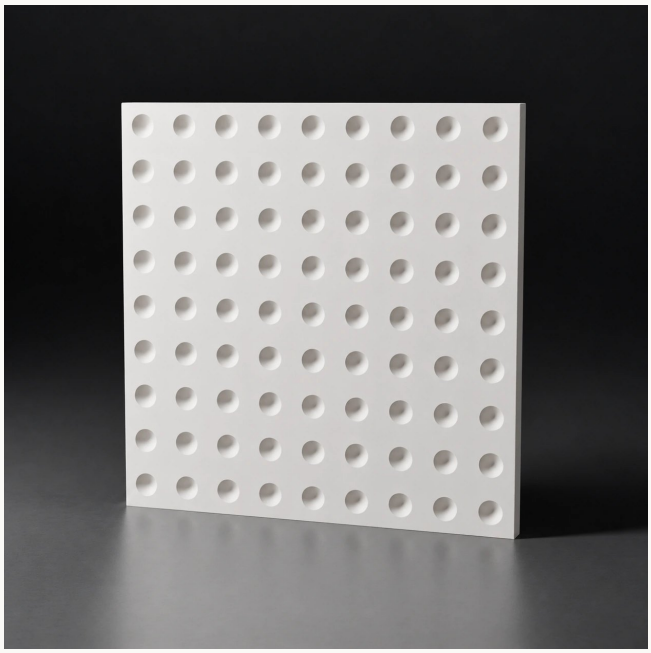

02 Three-quarter view

GYP-STD-007-A-01

Material	Fibre-reinforced plaster
Type	3D wall panel
Finish	Matt white · Fine mineral texture
Reference	GYP-STD-007-A-01
Format	500 × 500 mm
Total thickness	8–18.5 mm
Maximum relief	10.5 mm
Reference weight	5.44–5.89 kg
Coverage per panel	0.25 m^2
Use	Interior cladding in dry areas
Finish as supplied	Matt white, ready to prime and paint
Panels per m^2	4 panels/m^2
Repeat	One module · Same orientation

DESIGN AND CONTINUITY

Relief in the space



Cladding detail

The motif

A grid of nine by nine concave hollows introduces small changes in depth into a continuous surface. Side light reveals the inside of each hollow and its soft transition to the plane.

01 Laying

Align the pieces in the same orientation across the whole wall. Fill the joints with plaster and keep the hollows and their soft transitions.

02 Joints

Joints filled with plaster to form a continuous surface; keep the hollows of the design.

03 Reaction to fire

In preparation: formulation intended for class A1. Collection technical data sheet and installation guide available to download from the design's web page.