VORA

WAVES AND FOLDS / 2 × 2 ASSEMBLY



A broad, gentle curve transforms the light on white plaster.

Setting

GEOMETRY AND FORMAT

The piece

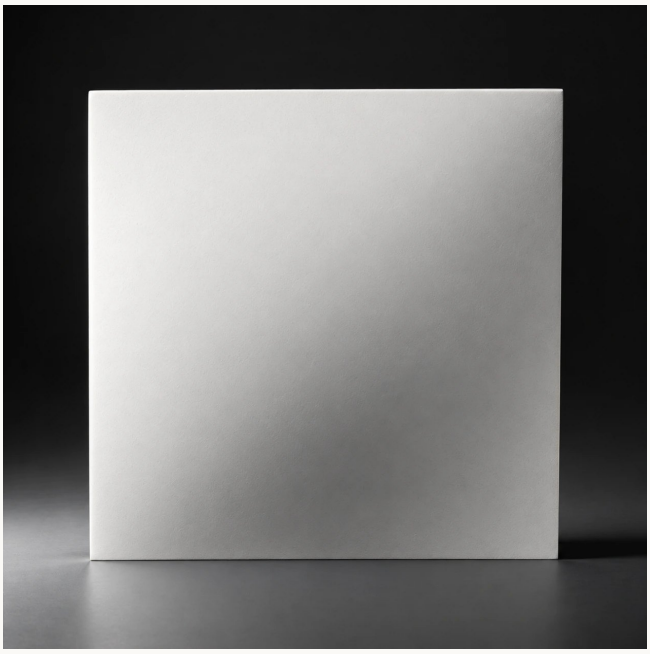

01 Front view

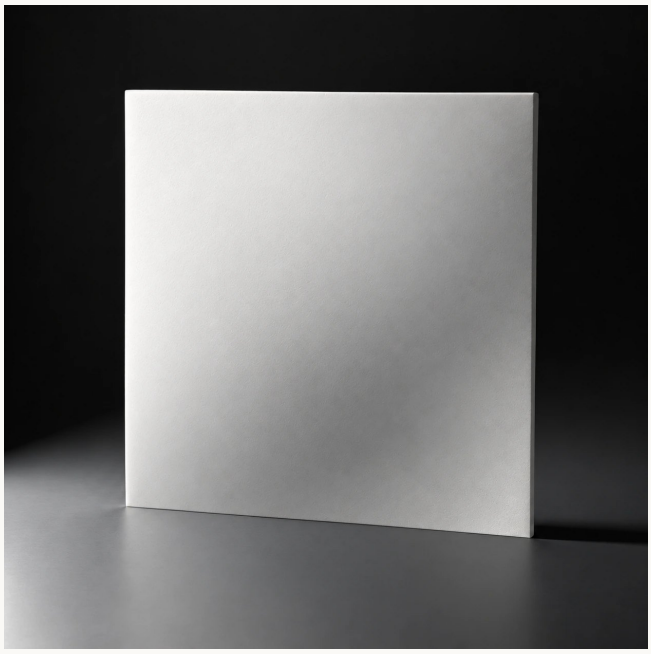

02 Three-quarter view

GYP-STD-009-A-01

Material	Fibre-reinforced plaster
Type	3D wall panel
Finish	Matt white · Fine mineral texture
Reference	GYP-STD-009-A-01
Format	500 × 500 mm
Total thickness	10–25 mm
Maximum relief	15 mm
Reference weight	5.38–5.82 kg
Coverage per panel	0.25 m^2
Use	Interior cladding in dry areas
Finish as supplied	Matt white, ready to prime and paint
Panels per m^2	4 panels/m^2
Repeat	One module · 2 × 2 assembly

DESIGN AND CONTINUITY

Relief in the space



Cladding detail

The motif

A double-curved surface links high and low corners with no interior edges. Four rotated positions of the same module form a continuous one-metre composition that extends across the whole wall.

01 Laying

Follow the four-piece assembly shown in the diagram: C and D at the top, A and B at the bottom. A is the reference position; B and C are rotated 90° and D 180°. Repeat the 1000 × 1000 mm composition and fill the joints with plaster, keeping the curvature. The letters identify positions of the same module.

02 Joints

Joints filled with plaster to keep the curved surface continuous.

03 Reaction to fire

In preparation: formulation intended for class A1. Collection technical data sheet and installation guide available to download from the design's web page.