NEXA

WAVES AND FOLDS / SAME ORIENTATION



Soft bands interlink in a continuous relief of white plaster.

Setting

GEOMETRY AND FORMAT

The piece

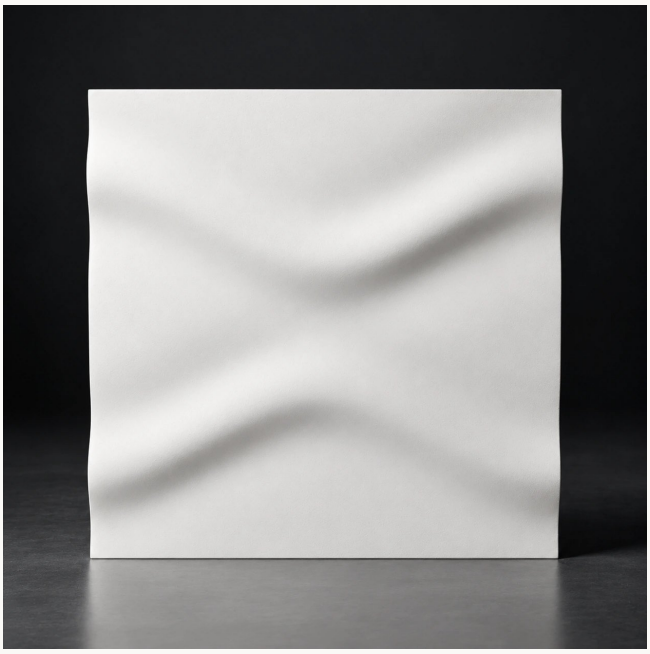

01 Front view

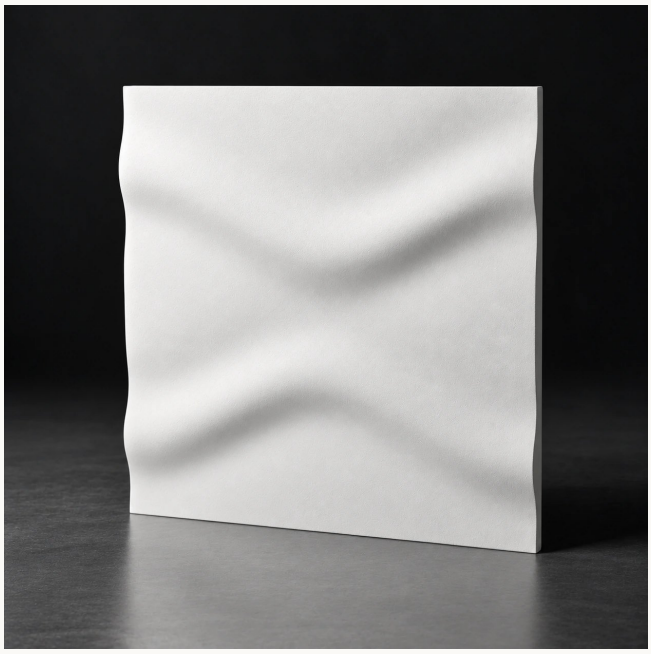

02 Three-quarter view

GYP-STD-010-A-01

Material	Fibre-reinforced plaster
Type	3D wall panel
Finish	Matt white · Fine mineral texture
Reference	GYP-STD-010-A-01
Format	500 × 500 mm
Total thickness	10–25 mm
Maximum relief	15 mm
Reference weight	5.21–5.64 kg
Coverage per panel	0.25 m^2
Use	Interior cladding in dry areas
Finish as supplied	Matt white, ready to prime and paint
Panels per m^2	4 panels/m^2
Repeat	One module · Same orientation

DESIGN AND CONTINUITY

Relief in the space



Cladding detail

The motif

Double-curved folds follow one another diagonally and link their valleys when the piece is repeated. Side light runs across their soft transitions and reveals a continuous rhythm with no interior edges.

01 Laying

Align the pieces in the same orientation across the whole wall, without rotations. Fill the joints with plaster and keep the folds and valleys continuous.

02 Joints

Joints filled with plaster to keep the folds and valleys continuous.

03 Reaction to fire

In preparation: formulation intended for class A1. Collection technical data sheet and installation guide available to download from the design's web page.